

Galaxy 1000 IP Phone

Quick Installation Guide



1. Installation

Bracket Installation

Please follow the instructions as shown in the image below

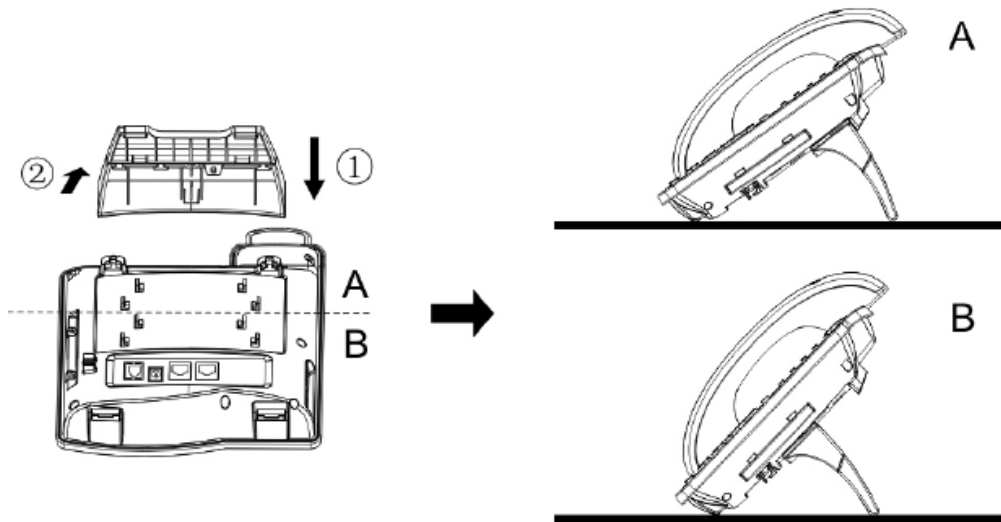


Fig 1. Bracket Installation

Assembling the device

Please connect the Power Adapter, Network cable, PC cable, Handset and Headset cable to the corresponding ports as shown in the image below.

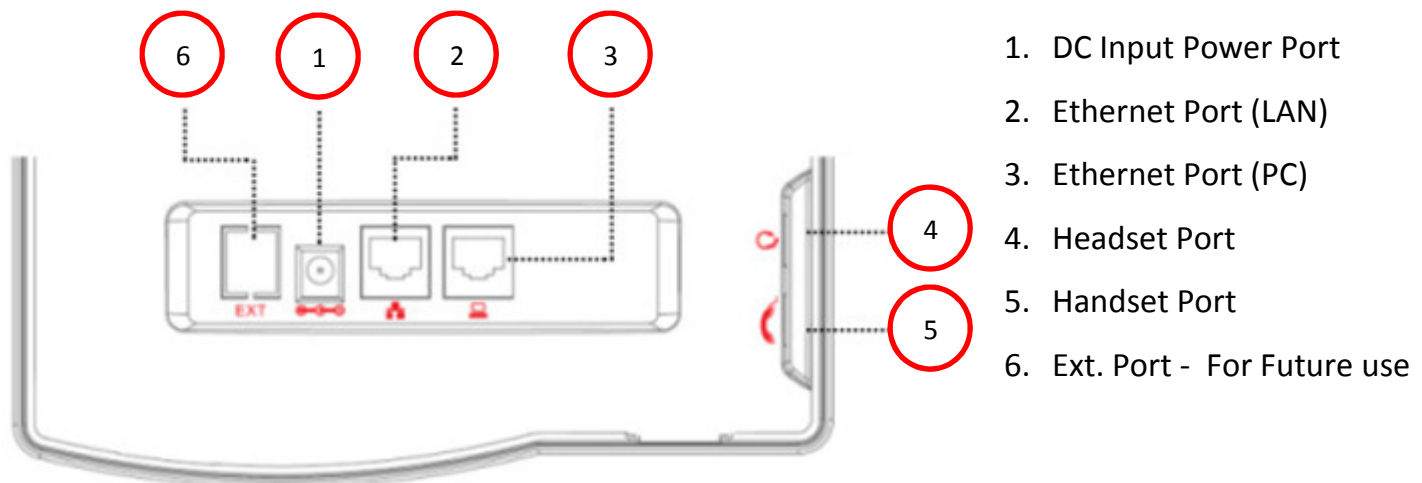


Fig 2. Assembling the device

2. SIP Settings

Web Portal Login

In the Galaxy 1000 IP Phone, user can obtain the IP address by pressing the softkey option [Menu] ---> [Status]. Then open the device's web portal page by entering the IP address of the device in a browser. The default User Name and Password is 'admin'.

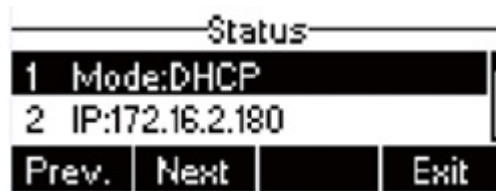


Fig 3. Obtain the device IP address

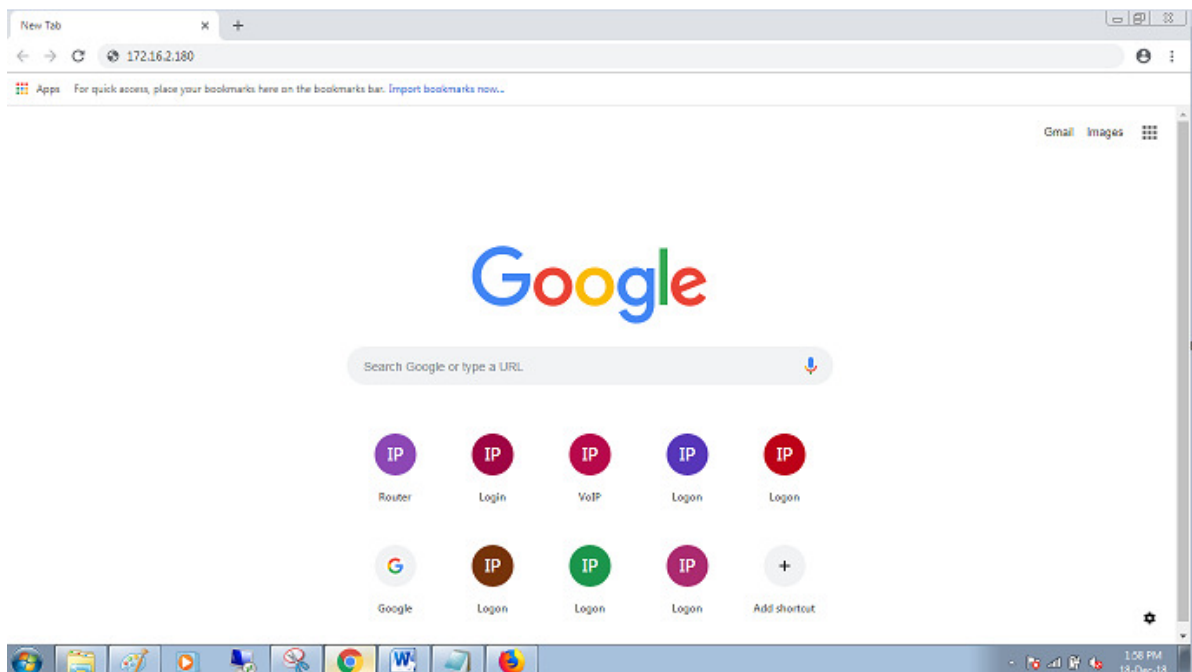


Fig 4. Device IP address in the web browser



Fig 5. Web Portal Login Page

SIP Account Settings

Select “Line” in the home page as shown in the image below to configure SIP account.

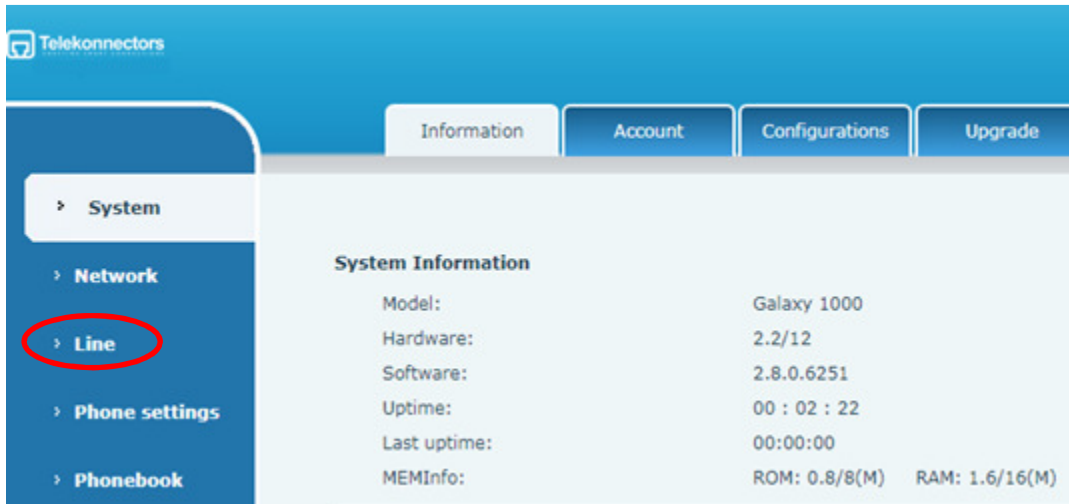


Fig 6. Home Page

Please contact your “IT Administrator” to obtain the Username, Display name, Authentication Name, Authentication Password and SIP Server Address details as shown in the image below. Select ‘Activate’ and click on ‘Apply’ to save this setting after entering the details.

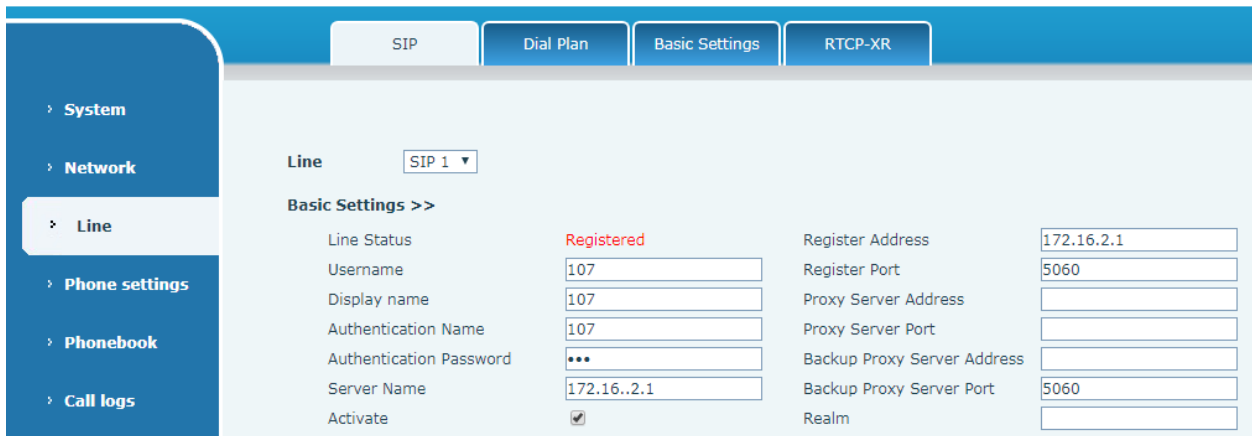


Fig 7. SIP Account Settings



Global HQ: T11-T12 Dr. VSI Estate, II Phase, 7th Street, Thiruvanimiyur, Chennai – 600 041 India

www.teleconnectors.com